

Features

- Stainless steel construction
- Tamper resistant
- Static strength 2,500 lbs. (fail secure)
- Dynamic strength 350 ft-lbs. (fail secure)
- Endurance 1,000,000 cycles
- Fail secure (standard)
- Non-handed
- Accommodates up to 1" deadbolt
- Plug-in connector
- Full keeper shims for horizontal adjustment
- Trim enhancer
- Dual voltage 12 or 24 VDC continuous duty
- Internally mounted solenoid
- Suitable for Outdoor Use

Certifications

- ASTM E152 Fire Door Compliant
- ANSI/ASTM E330
- ANSI/BHMA A156.31, Grade 1
- ANSI/SDI 250.13 Windstorm Resistant
- NFPA-252 fire door Compliant
- RoHS Compliant
- Florida Building Code Approved TAS 201, 202, 203 (old)
- Environmental Product Declaration (EPD)
- Health Product Declaration (HPD)
- UL 1034 Burglary-Resistant Listed
- UL 10C Fire-Rated, 1-1/2 Hour Double Door [Fail Secure only]
- UL 10C Fire-Rated, 3 Hour Single Door [Fail Secure Only]
- UL 294 Listed

Specifications

Frame Application

- Metal

Electrical

- .24 Amps at 12 VDC/VAC
- .12 Amps at 24 VDC/VAC
- DC continuous duty/AC intermittent duty only

Options

- Fail Safe
- LBM - Latchbolt monitor
- LBSM - Latchbolt strike monitor
- 27 interchangeable faceplate options (monitor switches may not work with all faceplate options)

Accessories

- **157** Torx® screws
- **1000-102** Rain guard
- **1006-103** Full Keeper Shims
- **1000-104** Lip Extension Trim Adapter
- **1006-105** Trim Enhancer
- **1000-110** Replacement Strike Plate
- **1000-130** KD Filler Plate
- **150** Strike Latch Guard
- **HESCU-MTK** Metal Template Kit
- **2005M3** SMART Pac® III

Dimensions

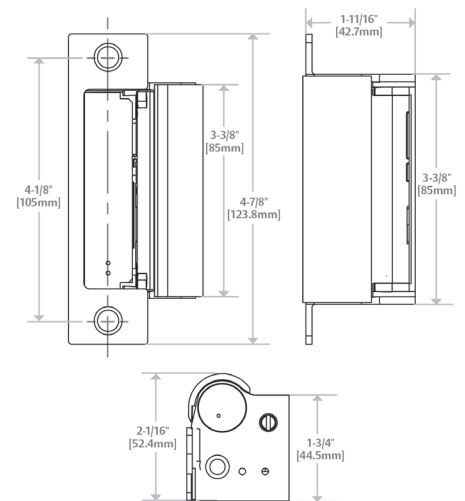


Diagram shown with DB faceplate