


STANDARD FEATURES INCLUDE:

- 10, 15, 20, 25, & 30 HP compressor options
- Stackable for reduced footprint
- Expandable in arrays of up to twelve, with zero clearance book end spacing
- Electrical available in 460/60/3 (all models) and 208-230/60/3 (<25HP)
- Industrial PLC color touchscreen with internal controls including lead-lag, staging, temperature output
- BACnet and Modbus via MSTP or Ethernet built in
- 140°F to 160°F (60°C to 71°C) output temperatures
- Machine suitable for outdoor applications
- 304L stainless steel frame and enclosure
- Integrated stainless steel circulator pump
- Double wall 316L stainless steel condenser
- Massachusetts Board of State Examiners of Plumbers and Gas Fitters approved
- NSF/ANSI 61 potable circuit rated, UL 1995 machine rating

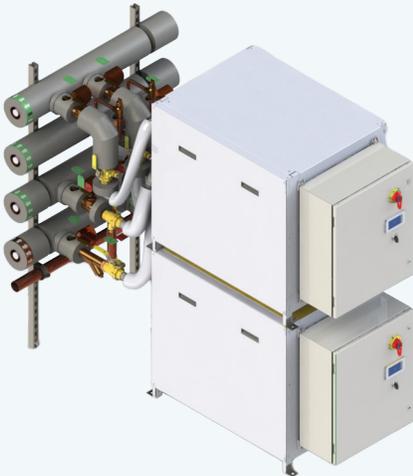

AVAILABLE OPTIONS INCLUDE:

- Compressor VFD for improved efficiency and control
- Remote Monitoring via ethernet, Wi-Fi, or cellular
- Header assemblies for multiple modules
- Single point electrical distribution for multiple modules
- High source circuit for source water temperatures over 110°F (43.3°C)
- Double wall 316L stainless steel evaporator to protect source water (ground water sources or domestic water cooling)



Made In the USA

